

Dynamic Heating & Cooling

DYNA-WIRE

CONSTRUCTION

Inner Core

- The inner core is constructed from a 100um thick, fire rated, UV stabilized aluminum film. Glued together with 1.2mm wire helix.

Insulation

- Insulated with a polyester fibre blend that has a thermal rating when tested to AS4508 of R0.6. Polyester insulation is nominally 250g at 40mm thick.

Outer Sleeve

- The outer sleeve is manufactured from a fine rated, 75um thick, tough, polyethylene .



APPLI CATIONS

- Gas Ducted Heating
- Evaporative Cooling
- Refrigerated Air-Conditioning

TECHNI CAL DATA

Operating Range: -5°C to 80°C

Complies with Australian Standards:


- AS4254 (fire rating)
- AS4508 (insulation)

DI MENS IONS

Available in 6 meter lengths

Diameters Available

150mm	200mm	250mm
300mm	350mm	350mm
400mm	450mm	500mm

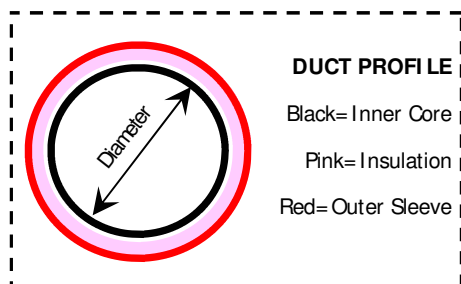

Dynamic Heating & Cooling

1426 Malvern Road,
Glen Iris, Victoria, 3146

www.dynamicheatcool.com.au